

CHASER-M6/120P

375-395W

HJT 9BB HALF-CUT BIFACIAL
DOUBLE GLASS MODULE

Hi-Chaser

SK8610HDGDC

30

30-year quality warranty with longer operational life

1500V

1500V high system voltage design



Fire class A, harsh environment adaptability

Consist of double-glass, with special design cells,
Outstanding anti-PID performance.



30 -year power warranty

Bifacial module ensures 30-year outdoor operation, longer than the
conventional type of normally 25 years.



Elegant appearance & high performance

The bifacial module is of high light transmittance to ensure good
performance, an advanced solution that enables more energy generation,
light capturing and elegant appearance.



1500V system voltage

Maximum 1500V DC system voltage , excellent insulation performance
and lower total system cost.


LINEAR PERFORMANCE WARRANTY

25
years

Product warranty on materials and workmanship

30
years

Linear power output warranty

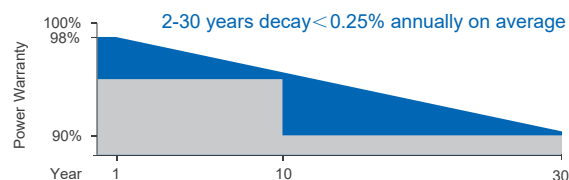

CERTIFICATES

ISO 9001: 2015
Quality Management System

IEC 61215 / IEC 61730

ISO 14001: 2015
Environmental Management System

OHSAS 18001: 2007
Occupational Health &
Safety Management System

*Certification requirements vary in different markets, please consult with Akcome
Optronics sales team for appropriate certification.

ELECTRICAL PARAMETERS @ STC

	375 Front	303 Back	380 Front	307 Back	385 Front	312 Back	390 Front	316 Back	395 Front	320 Back
Max. Power Output Pmax (W)										
Power Tolerance	0~+3%		0~+3%		0~+3%		0~+3%		0~+3%	
Max. Power Voltage Vmp (V)	37.47	37.89	37.67	38.09	37.86	38.28	38.05	38.47	38.24	38.66
Max. Power Current Imp (A)	10.01	8.01	10.09	8.07	10.17	8.14	10.25	8.20	10.33	8.26
Open Circuit Voltage Voc (V)	44.20	43.76	44.45	44.01	44.70	44.26	44.95	44.51	45.20	44.76
Short Circuit Current Isc (A)	10.78	8.68	10.85	8.73	10.92	8.79	10.99	8.85	11.06	8.90
Module Efficiency (%)	19.98	16.17	20.25	16.38	20.51	16.59	20.78	16.81	21.05	17.02

*STC (Standard Test Condition): Irradiance 1000W/m² , Cell Temperature 25°C, Air Mass 1.5

*Measurement Tolerance (±3.0%)

Inegrated Power @ STC (Refrence to 385W front)

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	404	424	442	461	480
Max. Power Voltage Vmp (V)	37.86	37.86	37.76	37.76	37.76
Max. Power Current Imp (A)	10.68	11.19	11.70	12.20	12.71
Open Circuit Voltage Voc (V)	44.70	44.70	44.80	44.80	44.80
Short Circuit Current Isc (A)	11.47	12.01	12.56	13.10	13.65

TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.24%/ °C
Temperature Coefficients of Voc	-0.22%/ °C
Temperature Coefficients of Isc	+0.047%/ °C

MECHANICAL PARAMETERS

Cell Type	HJT 166x83mm
Number of Cells	120pcs(6x20)
Dimensions (L*W*H)	1791x1048x30mm
Weight	23.5kg
Frame	Anodised Aluminum
Junction Box	IP67, 3 bypass diodes
Cable, Length	4.0mm ² , 300mm


OPERATING CONDITION

Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max. Wind Load / Snow Load(pa)	2400/5400
Max. Over Current(A)	20
Fire Rating	Class A
NOCT(°C)	45±2

PACKAGE INFORMATION


Container 40'HQ	840pcs
Quantity / Pallet	CTNR: 35pcs

ASSEMBLY DRAWING (Unit:mm)

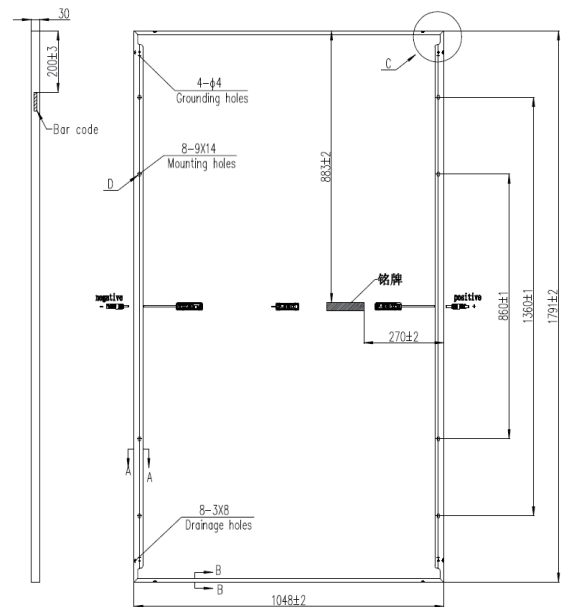

I-V CURVES

Test temperature 25°C

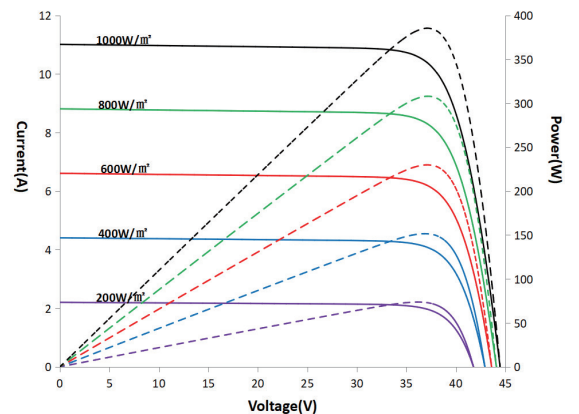

Irradiance: AM1.5, 1000W/m²

